


Description

The PD53T03 is a low profile, sub-miniature Wilkinson power divider in an easy to use surface mount package. The PD53T03 is ideal for high volume manufacturing and delivers higher performances than traditional printed and lumped element solutions. The PD53T03 is matched to 50 Ω and has a height profile of 0.5 mm which is ideal for high level integrations in the following markets: DVB-S, DVB-H (USA), GSM, DCS, PCS, CDMA, 3G and GPS. The PD53T03 does not include the resistive element and therefore, requires an external resistor for operation. The PD53T03 is available on tape and reel for high volume manufacturing pick and place.



Features:

- 4550-5900 MHz
- High Return Loss
- 0.5mm Height Profile
- 50 Ω Input / 50 Ω Outputs
- Low Insertion Loss
- Surface Mountable
- Tape & Reel
- Non-conductive Surface
- RoHS Compliant
- External resistor required
- Halogen Free


Electrical Specifications

Frequency	Isolation	Insertion Loss	Return LOSS
MHz	dB Min	dB Max	Min (dB) Input/Output
4550-5900	14	0.7	7.9/11
Amplitude Balance	Phase Balance	Power	Operating Temp.
dB Max	Degrees	Avg. CW Watts at 105°C	°C
± 0.30	± 4.0	2	-55 to +85

Notes:

1. All the above data are based on specified demo board.
2. Insertion loss: Thru board loss has been removed.

Mechanical Outline

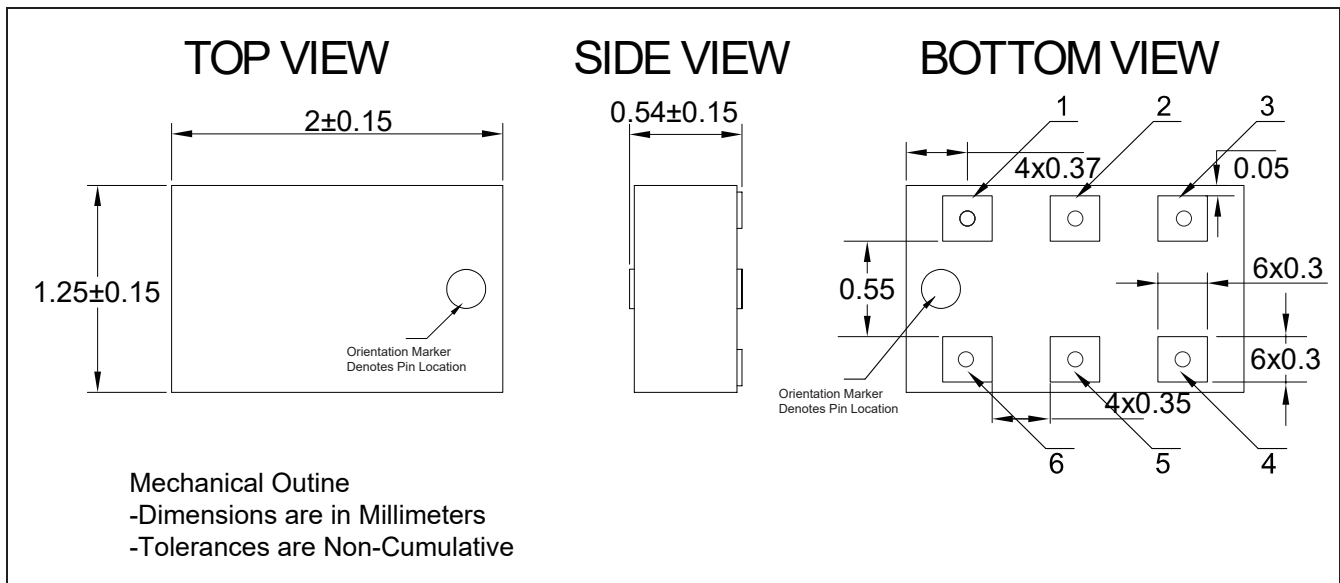

Yantel Corporation


Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Hybrid Coupler Pin Configuration

The PD53T03 has an orientation marker to denote Pin1. Once port one has been identified the other ports are known automatically. Please see the chart below for clarification:

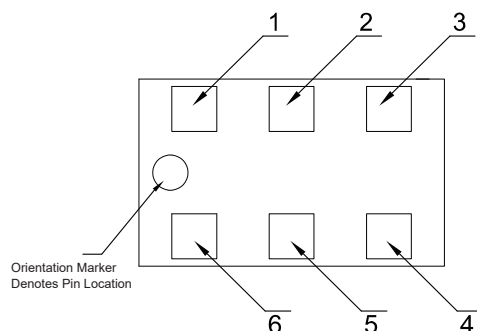

Pin	Designation
1	GND
2	input
3	GND
4	Output 1
5	GND
6	Output 2

Typical Performance Data (@25°C)

Frequency (MHz)	Coupling (dB)	Transmission (dB)	Insertion Loss (dB)	Isolation (dB)	Amplitude Balance (dB)	Phase (degree)	Return Loss(dB)		
							S11	S22	S33
4550	-0.13	-0.32	0.13	-27.51	0.19	-4.53	-14.25	-15.95	-14.58
4618	-0.14	-0.32	0.13	-29.09	0.18	-4.54	-14.11	-15.15	-14.15
4685	-0.16	-0.34	0.11	-30.99	0.18	-4.59	-13.88	-14.65	-13.71
4753	-0.18	-0.36	0.11	-32.79	0.18	-4.76	-13.51	-13.87	-13.23
4820	-0.22	-0.37	0.07	-34.62	0.16	-4.76	-13.18	-13.16	-12.78
4888	-0.24	-0.41	0.04	-34.22	0.17	-4.86	-12.88	-12.67	-12.31
4955	-0.27	-0.43	0.01	-31.96	0.16	-4.95	-12.58	-12.09	-11.93
5023	-0.30	-0.45	-0.03	-29.57	0.15	-4.93	-12.33	-11.60	-11.56
5090	-0.33	-0.48	-0.05	-27.49	0.15	-5.06	-12.08	-11.12	-11.14
5158	-0.36	-0.49	-0.08	-25.58	0.13	-5.09	-11.82	-10.60	-10.77
5225	-0.40	-0.52	-0.12	-24.10	0.12	-5.23	-11.59	-10.19	-10.39
5293	-0.41	-0.53	-0.12	-22.61	0.12	-5.26	-11.43	-9.86	-10.03
5360	-0.45	-0.55	-0.16	-21.37	0.10	-5.27	-11.31	-9.40	-9.71
5428	-0.47	-0.56	-0.18	-20.42	0.09	-5.57	-11.26	-9.16	-9.41
5495	-0.49	-0.59	-0.21	-19.54	0.10	-5.69	-11.16	-8.84	-9.08
5563	-0.50	-0.61	-0.23	-18.63	0.11	-5.82	-11.09	-8.53	-8.78
5630	-0.51	-0.61	-0.23	-17.76	0.10	-5.85	-11.29	-8.44	-8.54
5698	-0.50	-0.59	-0.21	-17.00	0.09	-6.02	-11.41	-8.18	-8.40
5765	-0.52	-0.59	-0.22	-16.41	0.07	-6.24	-11.59	-7.93	-8.16
5833	-0.48	-0.56	-0.17	-15.82	0.09	-6.51	-11.83	-7.85	-7.96
5900	-0.47	-0.57	-0.17	-15.32	0.10	-6.68	-12.06	-7.71	-7.77


Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Typical Performance (-55°C, 25°C, 85°C, 125°C: 4550-5900 MHz)

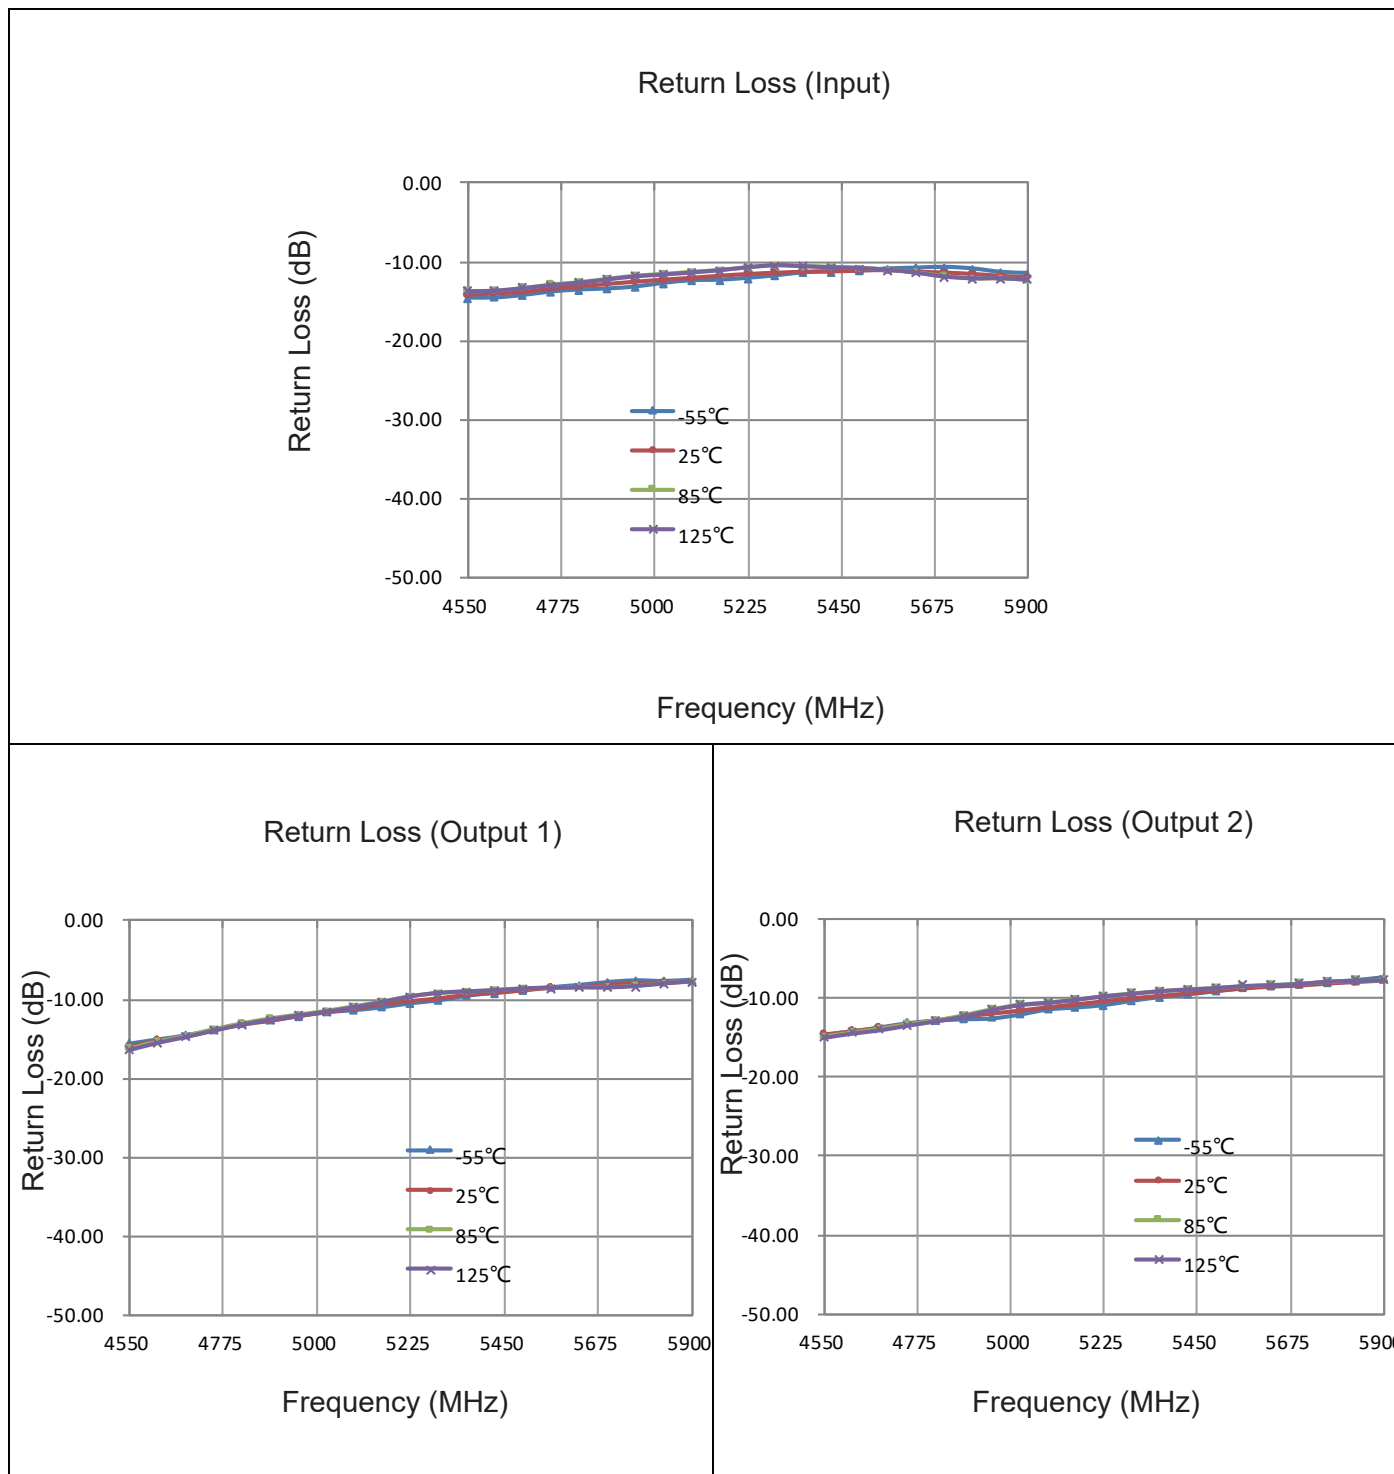


Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Typical Performance (-55°C,25°C,85°C,125°C: 4550-5900 MHz)

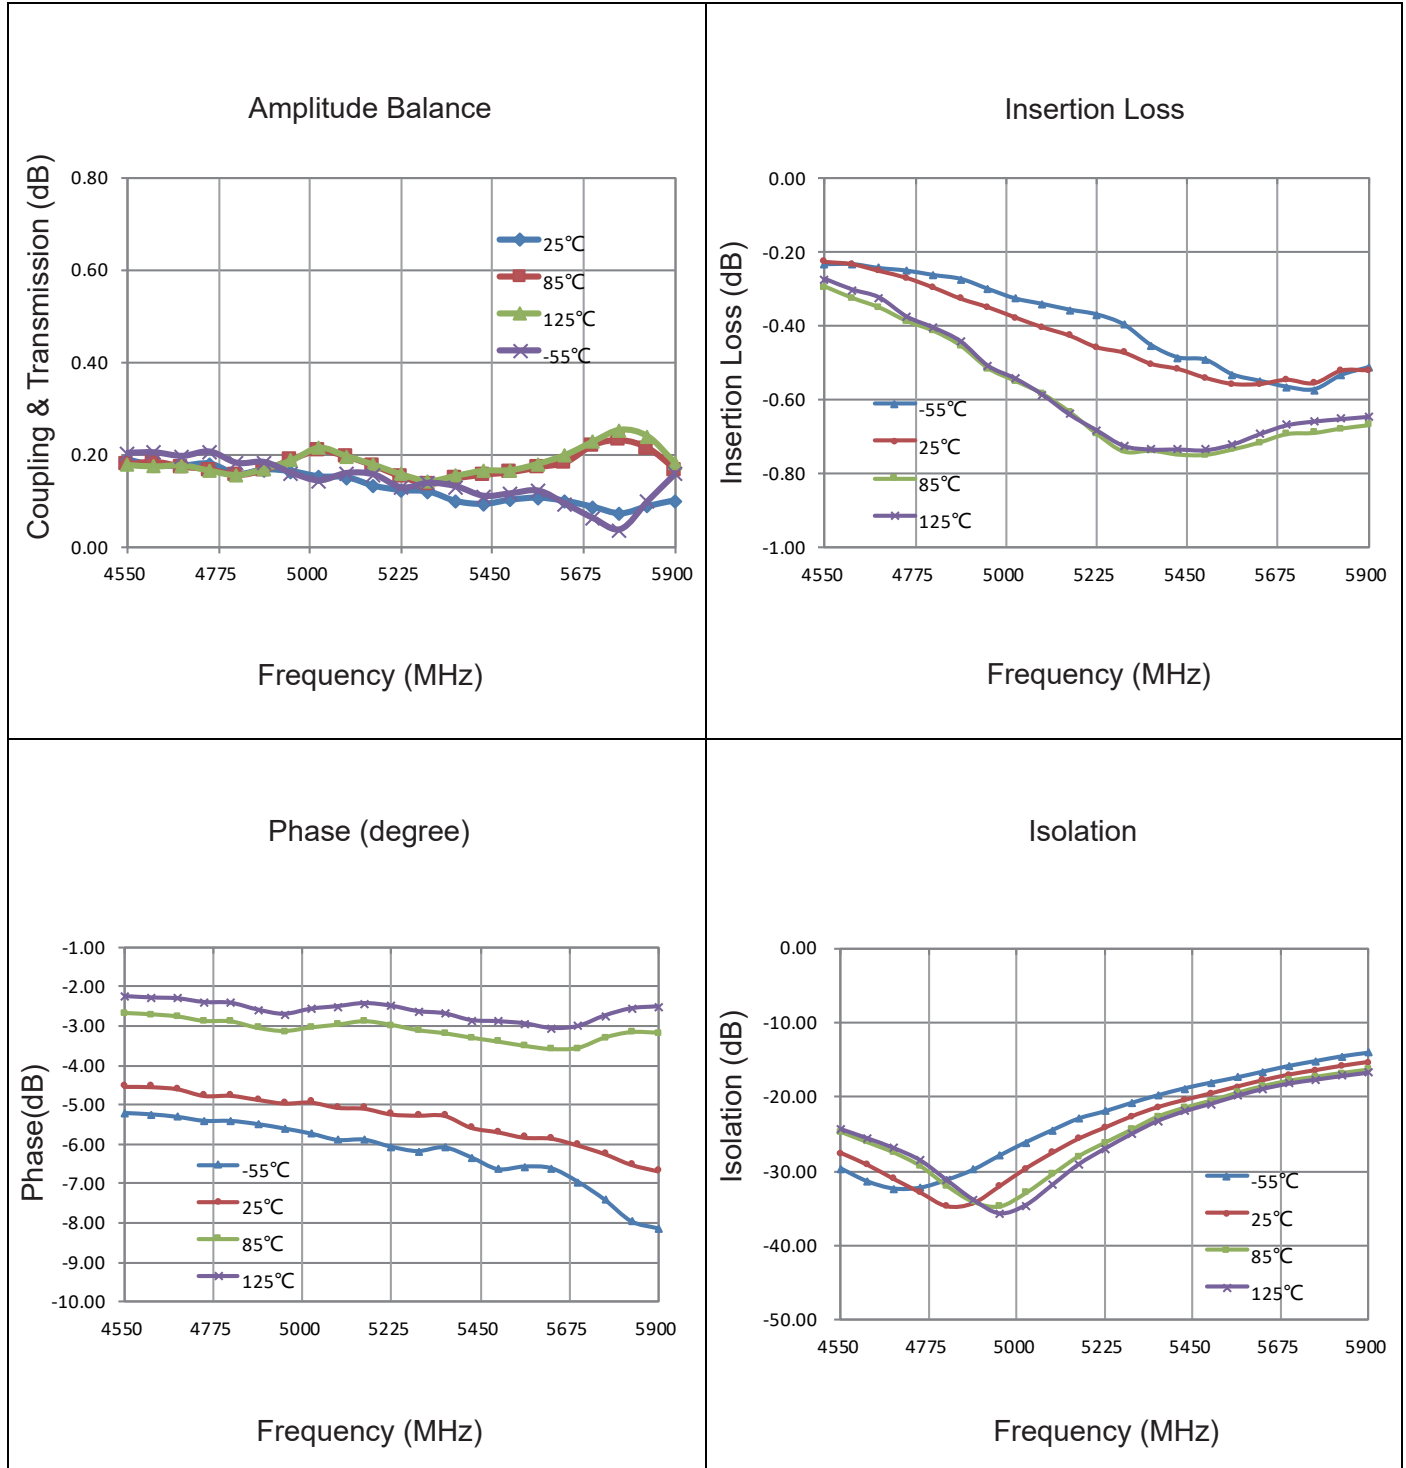

Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Definition of Measured Specifications

Parameter	Definition	Mathematical Representation
VSWR (Voltage Standing Wave Ratio)	The impedance match of the coupler to a 50Ω system. A VSWR of 1:1 is optimal.	$VSWR = \frac{V_{max}}{V_{min}}$ Vmax = voltage maxima of a standing wave Vmin = voltage minima of a standing wave
Return Loss	The impedance match of the coupler to a 50Ω system. Return Loss is an alternate means to express VSWR.	$\text{Return Loss (dB)} = 20 \log \frac{VSWR + 1}{VSWR - 1}$
Insertion Loss	The input power divided by the sum of the power at the two output ports.	$\text{Insertion Loss(dB)} = 10 \log \frac{P_{in}}{P_{cpl} + P_{transmission}}$
Isolation	The input power divided by the power at the isolated port.	$\text{Isolation(dB)} = 10 \log \frac{P_{in}}{P_{iso}}$
Phase Balance	The difference in phase angle between the two output ports.	Phase at coupled port – Phase at transmission port
Amplitude Balance	The power at each output divided by the average power of the two outputs.	$10 \log \left(\frac{P_{cpl}}{P_{cpl} + P_{transmission}} \right) \text{ or } 10 \log \left(\frac{P_{transmission}}{P_{cpl} + P_{transmission}} \right)$


Test Method

1. Calibrating your vector network analyzer.
2. Connect the VNA 4 Port to DUT respectively.
3. Measure the data of coupling through port 1 to port 4(S41).
4. Measure the data of transmission through port 1 to port 3(S31).
5. Measure the data of isolation through port 1 to port 2(S21).
6. Measure the data of phase port 4 & port 3(port 1 feeding).
7. Measure the data of return loss port 1, port 2, port 3 & port 4.
8. According to the above data to calculate insertion loss, amplitude balance & phase.

Note:

1. When calculating insertion loss at room temperature, demo board loss should be removed from both coupling & transmission data.
- Please refer to the below table for demo board loss :

Frequency Range(MHz)	Demo Board Loss (dB) @25°C
470-860	0.07
800-1000	0.10
1200-1700	0.15
1700-2000	0.15
2000-2300	0.20
2300-2700	0.25

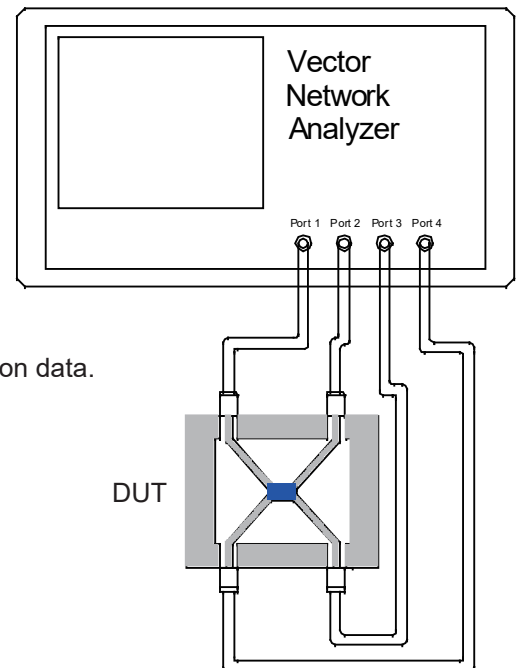


Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wen Yuan Road 35, Xili Street, Nanshan, Shenzhen, China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com


Recommended PCB Layout

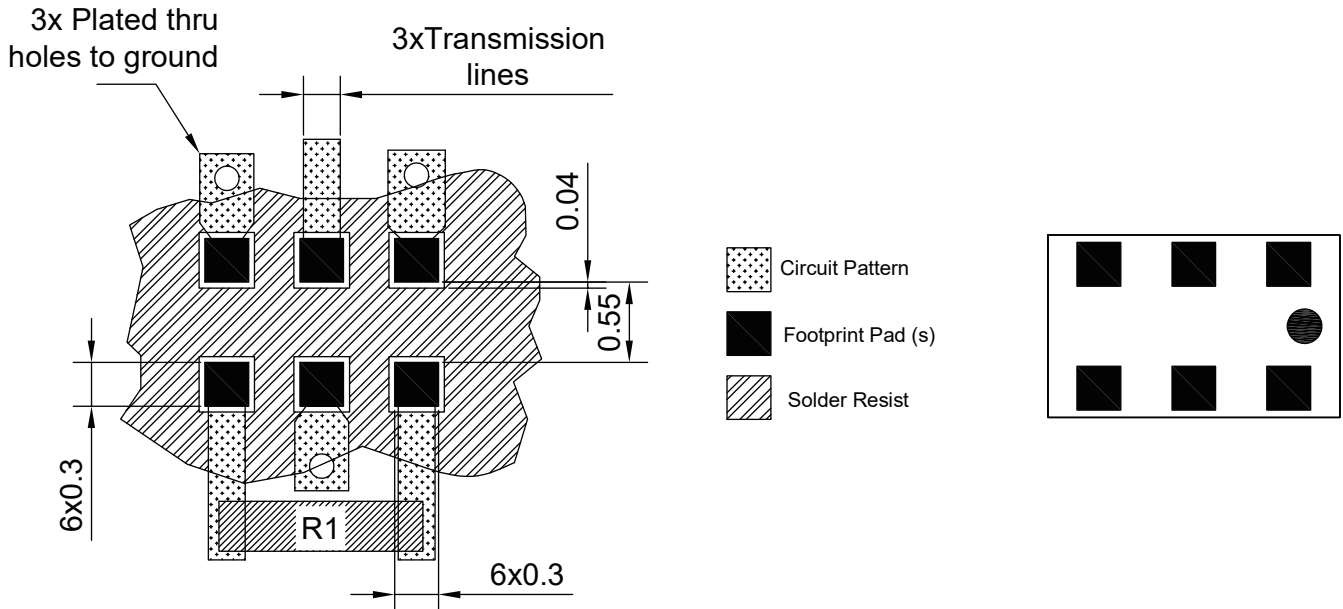

NOTE:

1. 50Ω line width is shown above designing.
2. Bottom side of the PCB is continuous ground plane.
3. All dimensions shown in mm [inch].

Reflow Profile

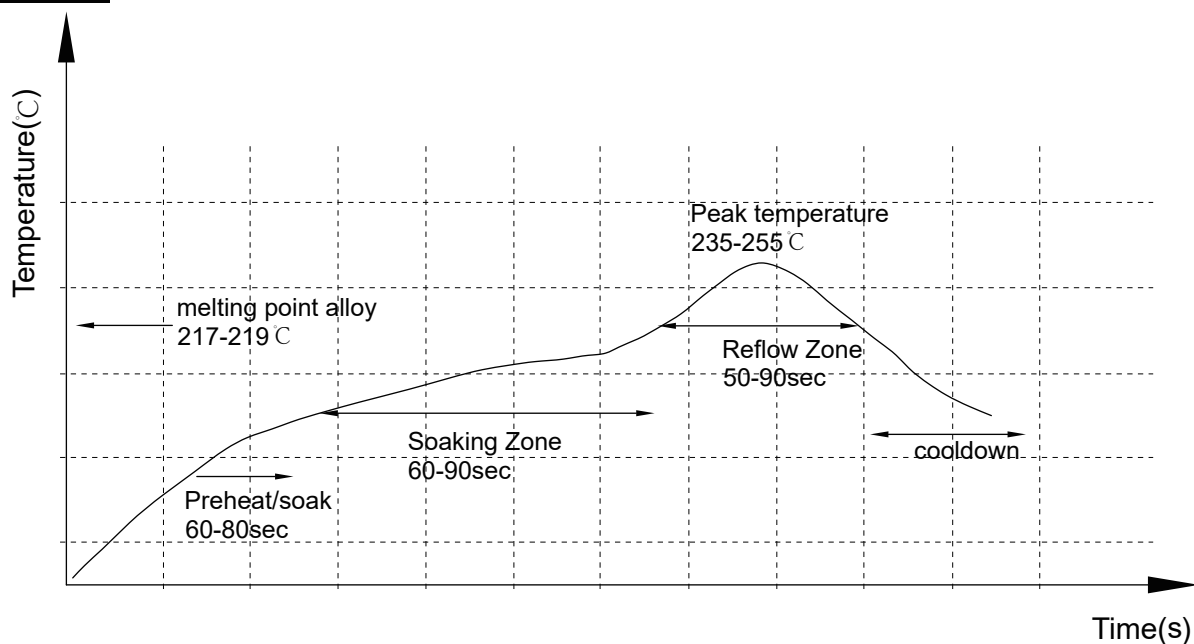


Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Reliability Test Flow

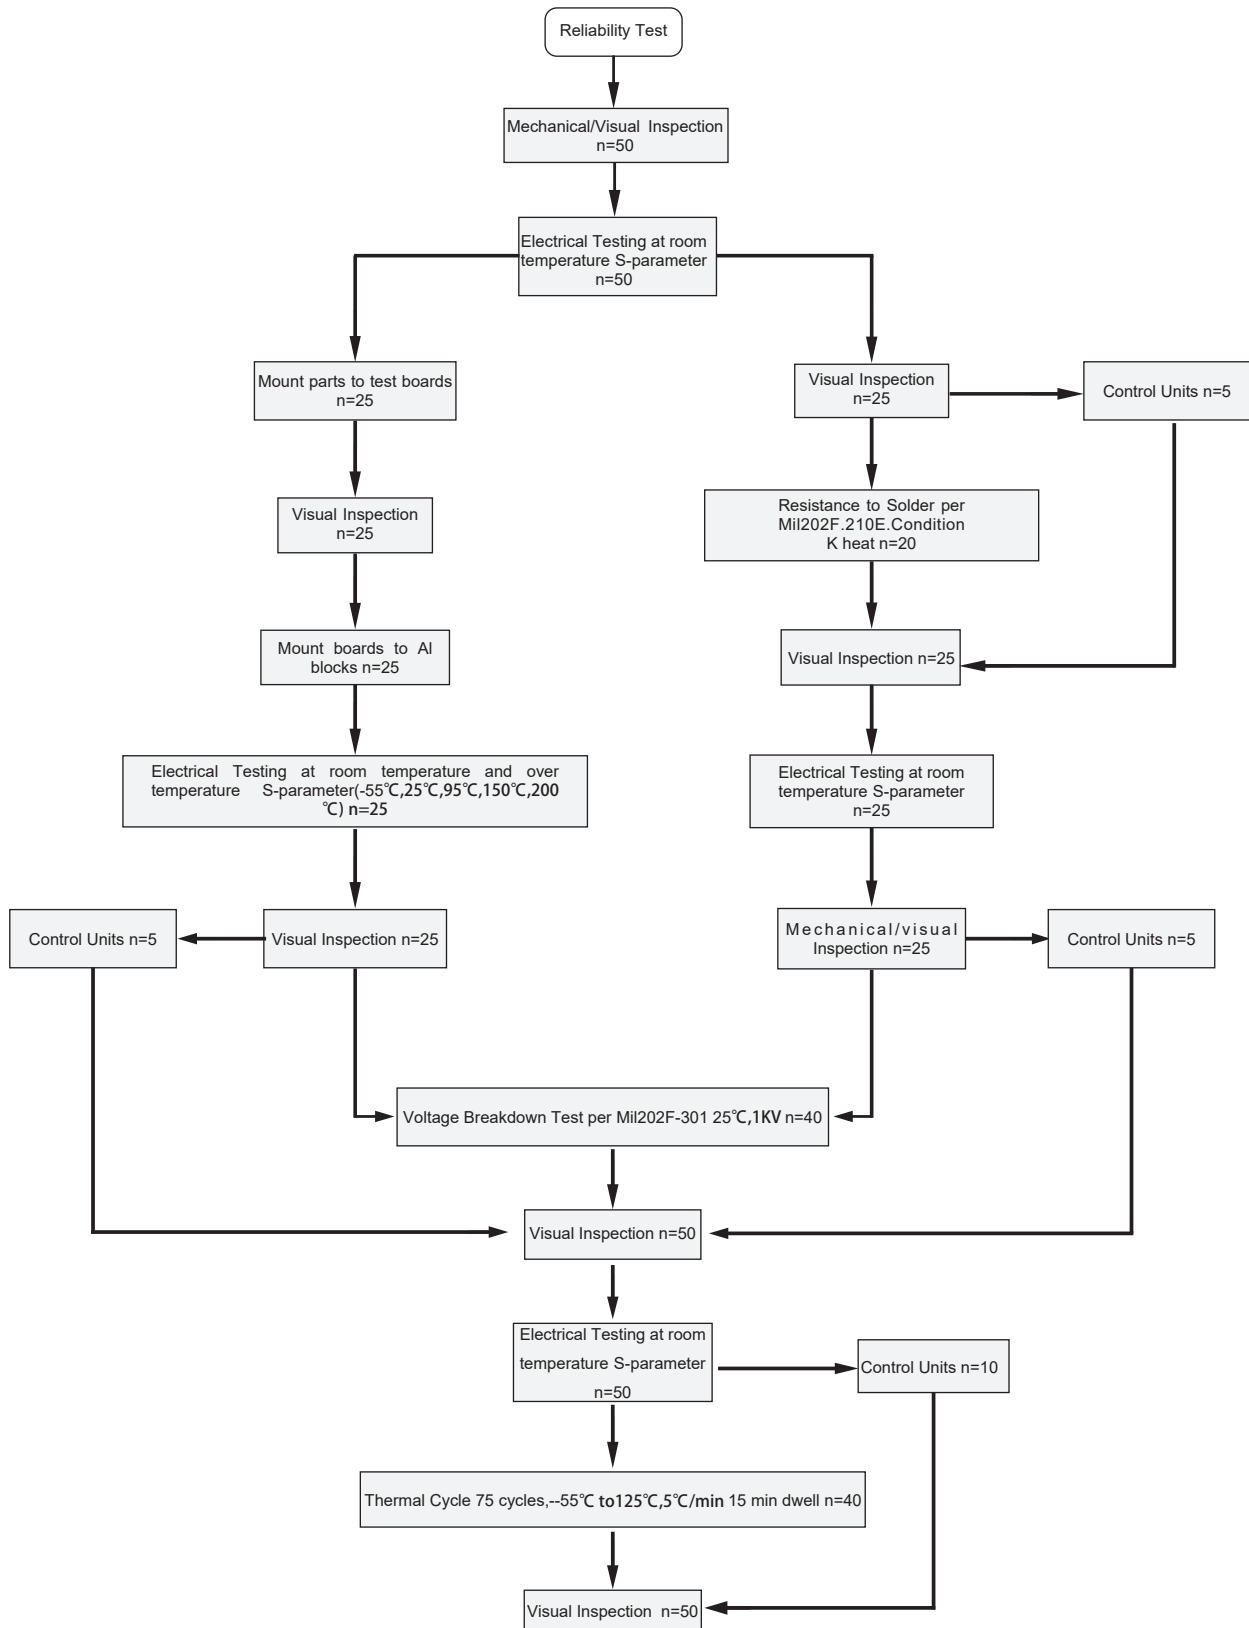


Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533


For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Reliability Test Flow

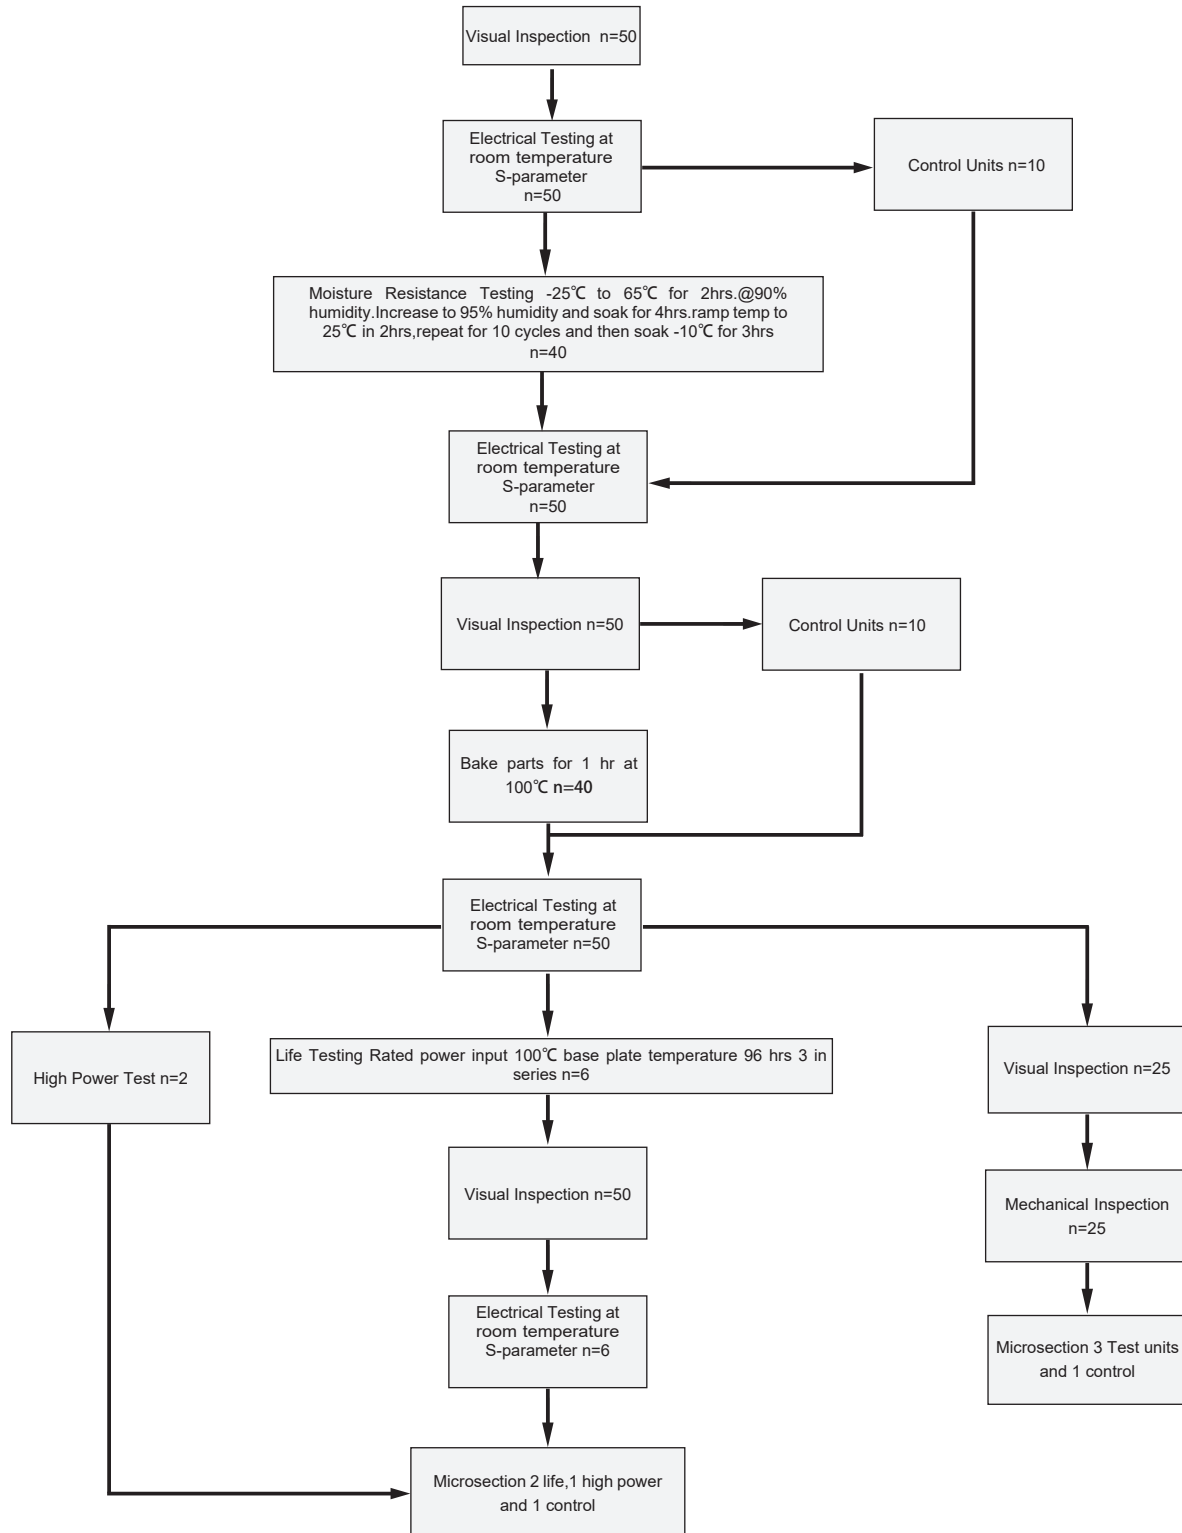

Tape and Reel Drawing


Feeding Direction

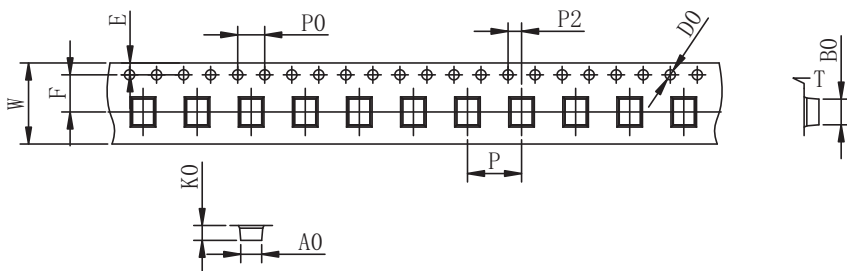


ITEM	W	A0	B0	K0	K1	P	F	E	D0	P0	P2	t	7"
DIM(mm)	8.0	1.45	2.30	1.00		4.0	3.5	1.75	1.5	4.0	2.0	0.2	P/R
TOLE	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.00	+0.10 -0.10	+0.10 -0.10	+0.05 -0.05	5000pcs

Notice:

- A. 10 Sprocket hole pitch cumulative tolerance is 0.2mm.
- B. Carrier camber shall be not more than 1mm per 100mm through a length of 250mm.
- C. All dimensions meet EIA-418-B requirements.
- D. A0 & B0 measured as indicated.
- E. K0 measured from a place on the inside bottom of the pocket to top surface of carrier.
- F. Material: PE 100
- G. Thickness: 0.30±0.05mm
- H. 2000 units (maximum) / T&R

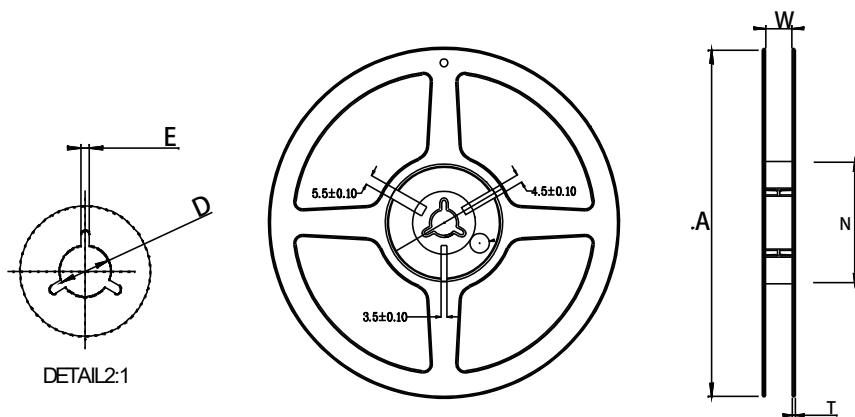

Symbol	Dimensions(mm)
W	9.0±0.4
A	180±0.3
N	60±0.3
T	1.4±0.2
E	3±0.5
D	25±0.8

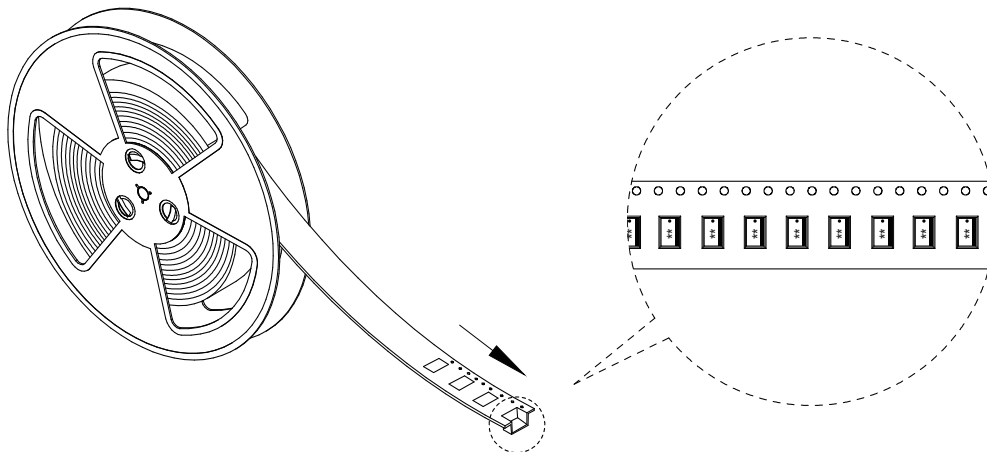

Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China

Tel: 86-755-8355-1886 Fax: 86-755-8355-2533

For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com