DC55F30

Directional Coupler

Rev A1.0

Description

The products are widely used in China and global 4G/5G base station, 5G network coverage, BeiDou navigation antenna, vehicle-mounted high-precision navigation (unmanned) antenna and other applications. The products have miniaturization, low-loss, wide-bandwidth, high power density, high reliability, high cost-effective and other competitive advantages.

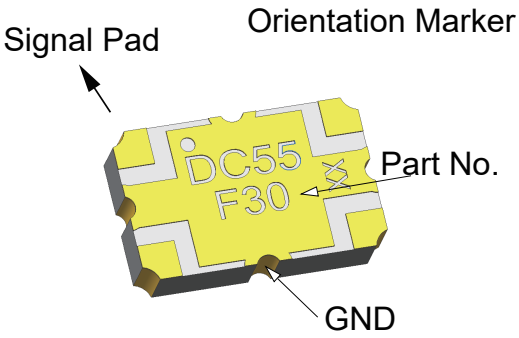

Features:

- **3600-6300 MHz**
- **WiMax & LTE**
- **High Power**
- **Very Low Loss**
- **Tight Amplitude Balance**
- **High Isolation**
- **Production Friendly**
- **Tape and Reel**
- **RoHS**

Electrical Specifications

Frequency	Coupling	Directivity	VSWR
MHz	*dB*	*dB Min*	*Max : 1*
3600 - 6300	30.0±3.5	20.0	1.50

Insertion Loss	Power	Operating Temp.
dB Max	*Avg. CW Watts @ 95degC*	*°C*
0.25	100	-55 to +95

Notes:
1. All the above data are based on specified demo board.
2. Insertion loss:Thru board loss has been removed.

Mechanical Outline

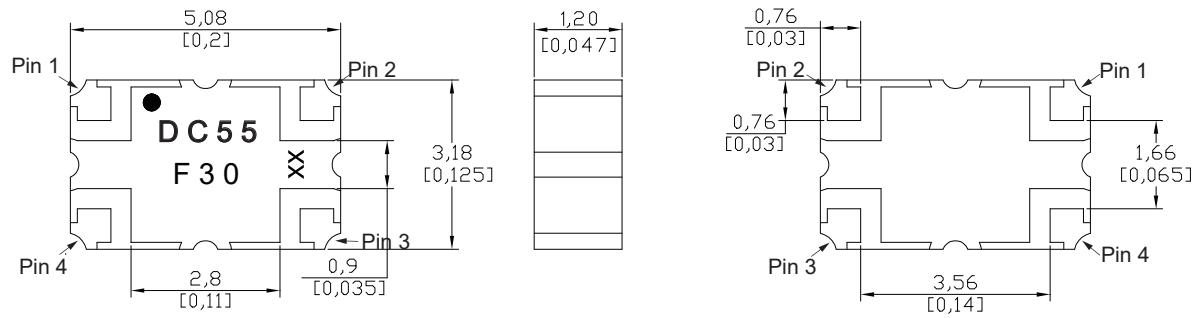

Note: 1. All Dimensions show in mm [inch]
2. RoHS Compliant in accordance with EU Directive(2011/65/EU)
3. REACH Compliant in accordance with Regulation (EC) No 1907/2006
4. Dimension tolerance: ±0.20mm[±0.008inch]

Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China
Tel: 86-755-8355-1886 Fax: 86-755-8355-2533
For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Preliminary Data Sheet

DC55F30

Directional Coupler

Rev A1.0

Directional Coupler Pin Configuration

The DC55F30 has an orientation marker to denote Pin1. Once port one has been identified the other ports are known automatically. Please see the chart below for clarification:

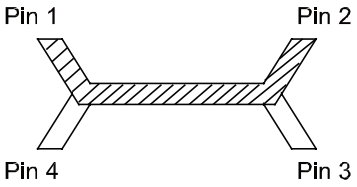

Pin 1	Pin 2	Pin 3	Pin 4
Input	Transmission	Isolate	Coupling
Transmission	Input	Coupling	Isolate

Typical Performance Data (@25

Frequency (MHz)	Coupling (dB)	Transmission (dB)	Insertion Loss (dB)	Directivity (dB)	Return Loss(dB)			
					S11	S22	S33	S44
3600	-27.09	-0.10	-0.09	-30.46	-21.77	-25.67	-26.69	-22.36
3735	-27.11	-0.11	-0.10	-28.88	-20.81	-23.08	-23.44	-21.19
3870	-27.05	-0.11	-0.11	-26.50	-20.83	-21.05	-21.07	-20.70
4005	-27.09	-0.12	-0.12	-25.03	-20.91	-18.98	-18.62	-20.72
4140	-27.11	-0.12	-0.11	-23.20	-21.67	-17.20	-16.88	-21.58
4275	-27.20	-0.12	-0.11	-22.34	-23.04	-16.05	-15.73	-22.66
4410	-27.28	-0.11	-0.10	-21.57	-25.06	-15.16	-14.96	-24.43
4545	-27.44	-0.11	-0.10	-21.39	-28.18	-14.84	-14.53	-26.70
4680	-27.57	-0.10	-0.09	-20.62	-32.29	-14.81	-14.54	-30.33
4815	-27.71	-0.09	-0.08	-20.39	-33.52	-15.19	-14.95	-34.53
4950	-27.88	-0.08	-0.07	-20.94	-30.75	-16.12	-15.83	-31.72
5085	-28.06	-0.07	-0.07	-20.54	-27.96	-17.34	-16.92	-27.98
5220	-28.29	-0.07	-0.06	-20.89	-26.59	-18.78	-18.26	-25.45
5355	-28.51	-0.08	-0.07	-22.18	-26.28	-20.84	-20.68	-24.20
5490	-28.81	-0.08	-0.07	-23.72	-26.83	-22.79	-23.21	-24.58
5625	-29.12	-0.08	-0.07	-22.60	-28.75	-25.05	-25.19	-26.28
5760	-29.45	-0.08	-0.08	-22.14	-33.37	-26.31	-26.61	-30.91
5895	-29.87	-0.06	-0.06	-23.42	-40.84	-26.52	-26.40	-41.12
6030	-30.33	-0.08	-0.08	-25.66	-32.12	-24.66	-24.31	-31.69
6165	-30.78	-0.06	-0.06	-26.04	-26.60	-22.41	-22.34	-25.51
6300	-31.28	-0.08	-0.07	-25.30	-23.26	-20.17	-20.12	-22.55

Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China
Tel: 86-755-8355-1886 Fax: 86-755-8355-2533
For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Power Derating Curves

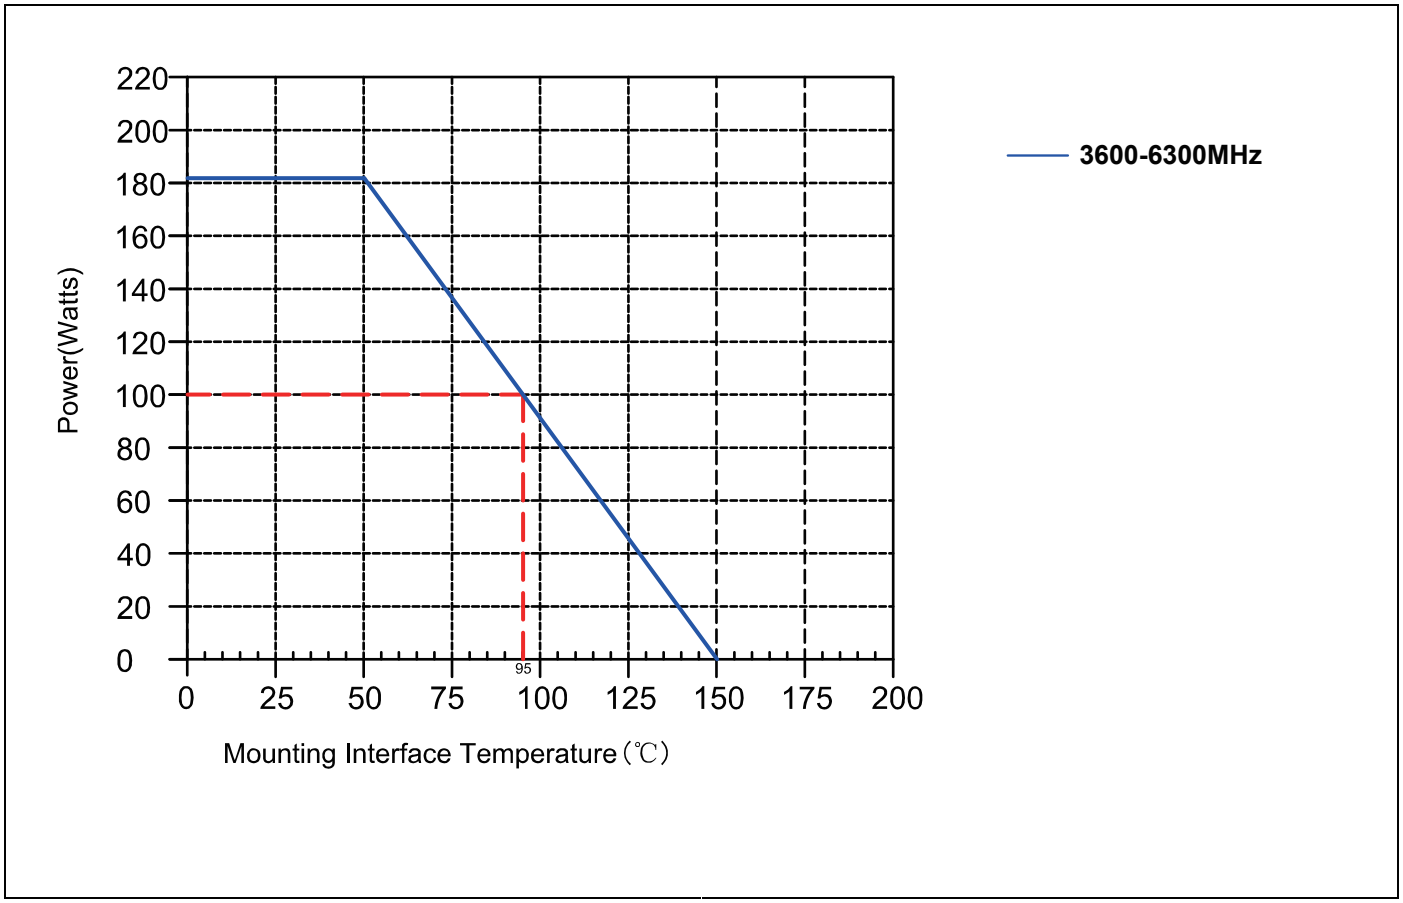

Power Derating:

As the mounting interface temperature approaches the maximum continuous operating temperature, the power handling decreases to zero.

Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China
Tel: 86-755-8355-1886 Fax: 86-755-8355-2533
For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

DC55F30

Directional Coupler

Rev A1.0

Typical Performance (-55°C, 25°C, 95°C, 125°C:3600-3600 MHz)

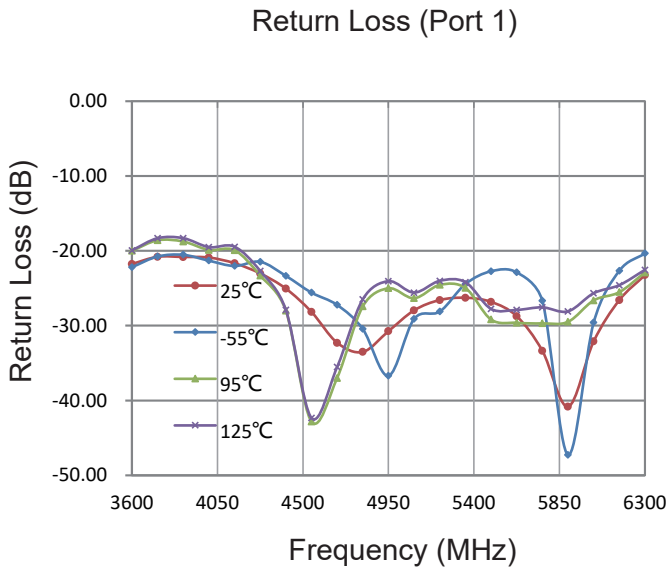

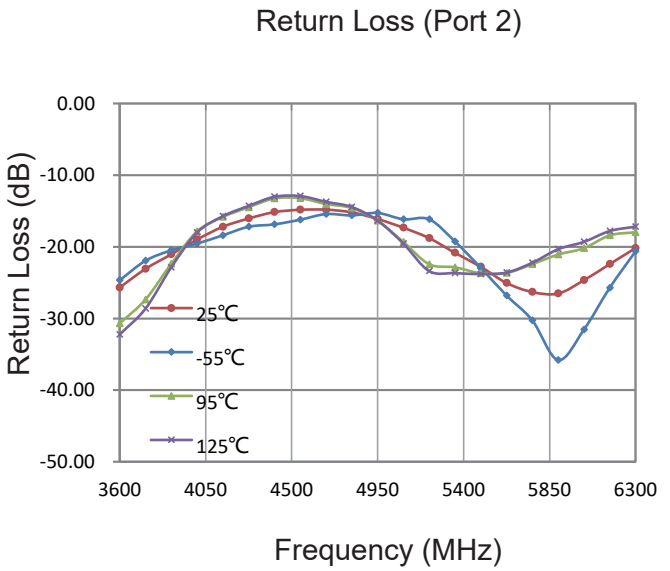

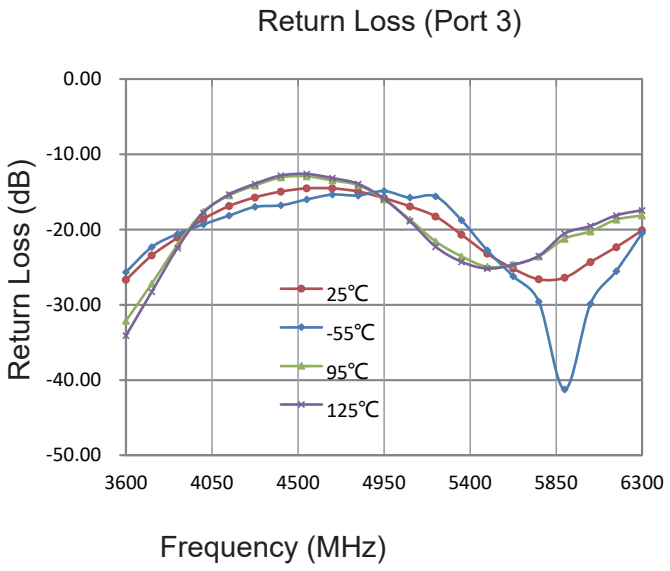

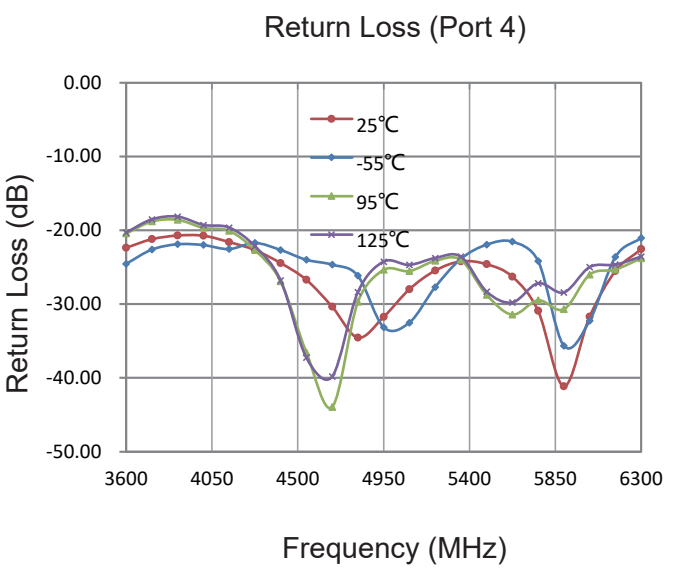

Yantel Corporation

Add：No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen， China
Tel：86-755-8355-1886 Fax：86-755-8355-2533
For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

DC55F30

Directional Coupler

Rev A1.0

Typical Performance (-55°C, 25°C , 95°C,125°C: 3600-6300 MHz)

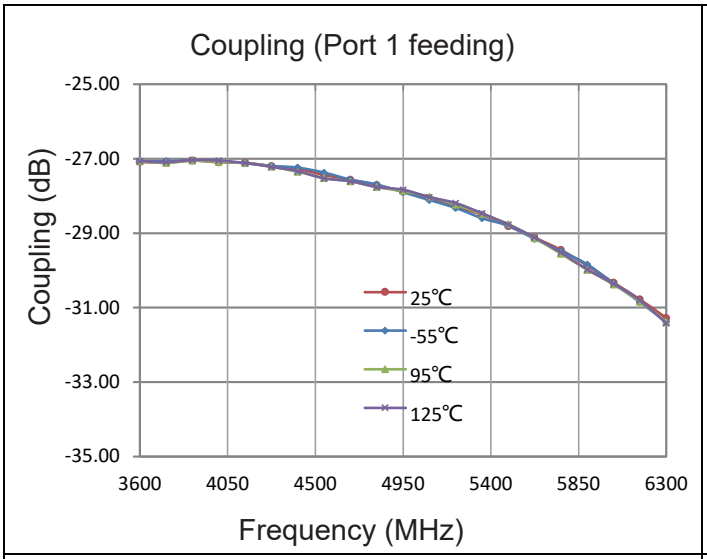

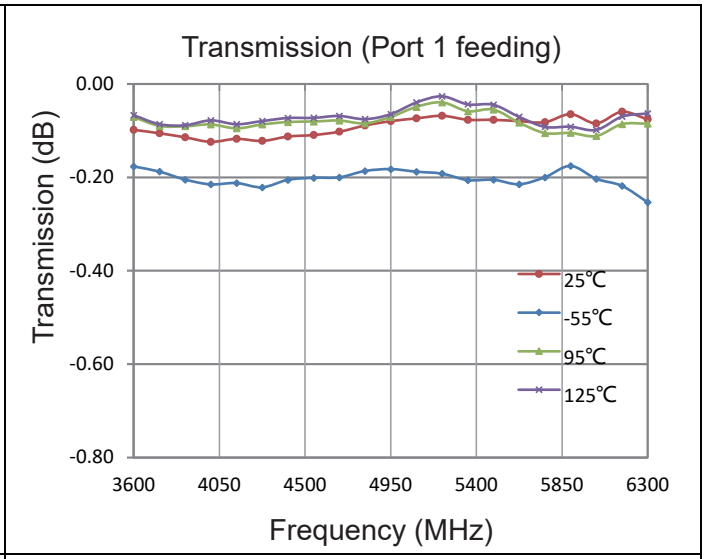

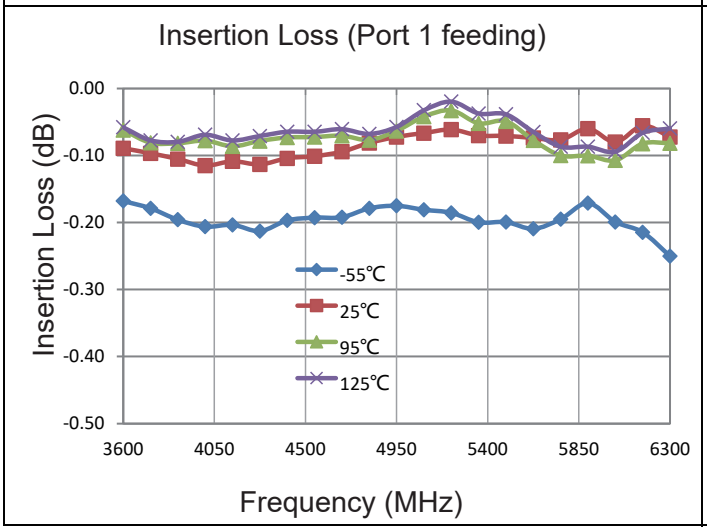

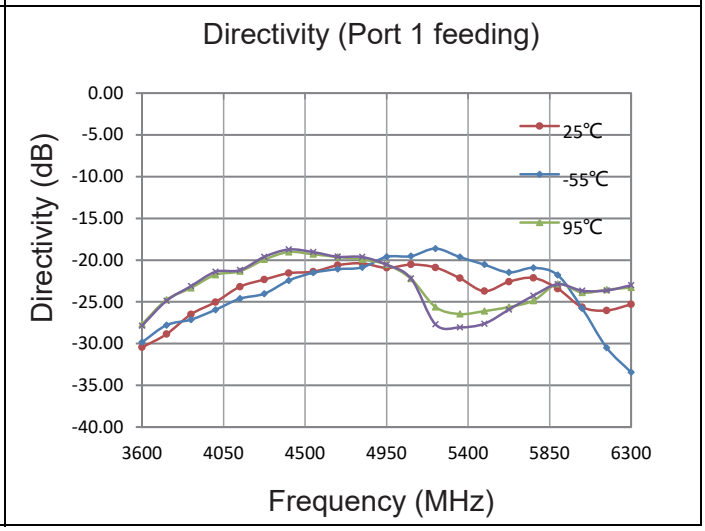

Yantel Corporation

Add：No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen， China
Tel：86-755-8355-1886 Fax：86-755-8355-2533
For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

DC55F30

Directional Coupler

Rev A1.0

Description of Measured Specifications

Parameter	Description
VSWR	Voltage standing wave ratio, the impedance match to 50Ω, the ideal value is 1:1.
Return Loss	Loss of signal power resulting from the reflection caused by discontinuity of transmission line.
Insertion Loss	The input power divided by sum of power at the coupling port & transmission port.
Coupling	The input power divided by the power at coupling port.
Transmission	The input power divided by the power at transmission port.
Directivity	The power at the coupling port divided by the power at the isolated.

Test Method

1. Calibrating your vector network analyzer.
2. Connect the VNA 4 Port to DUT respectively.
3. Measure the data of coupling through port 1 to port 4(S41).
4. Measure the data of transmission through port 1 to port 2(S21).
5. Measure the data of isolation through port 1 to port 3(S31).
6. Measure the data of return loss port 1, port 2, port 3 & port 4.
7. According to the above data to calculate insertion loss, directivity.

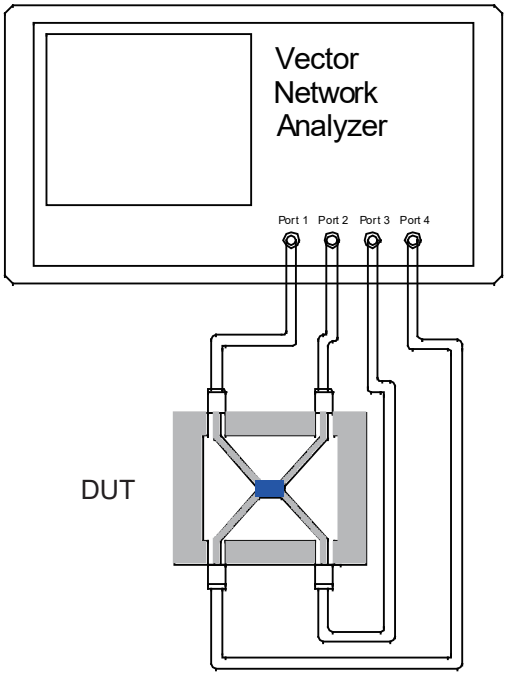

Note:
1. When calculating insertion loss at room termperature,
coupling & transmission data both need remove demo board loss.
Please see demo board loss data below the table :

Frequency Range(MHz)	Demo Board Loss (dB) @25℃
470-860	0.06~0.10
800-1000	0.10~0.15
1200-1700	0.15~0.20
1700-2000	0.20~0.25
2000-2300	0.20~0.25
2300-2700	0.25~0.30

Yantel Corporation

Add：No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen， China
Tel：86-755-8355-1886 Fax：86-755-8355-2533
For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Recommended PCB Layout

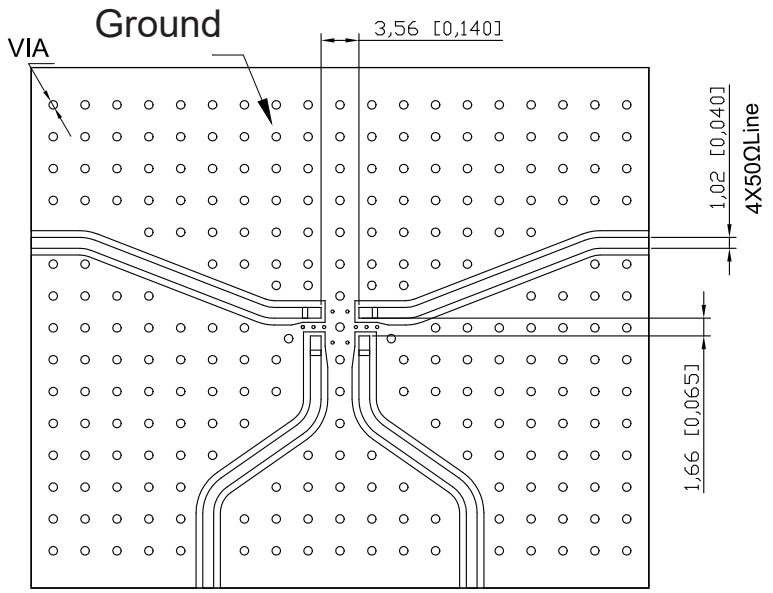

NOTE:

1. 50Ω line width is shown above designing from Er=3.66 THK=20mil copper 1 OZ
2. Bottom side of the PCB is continuous ground plane.
3. All dimensions shown in mm [inch].

Reflow Profile

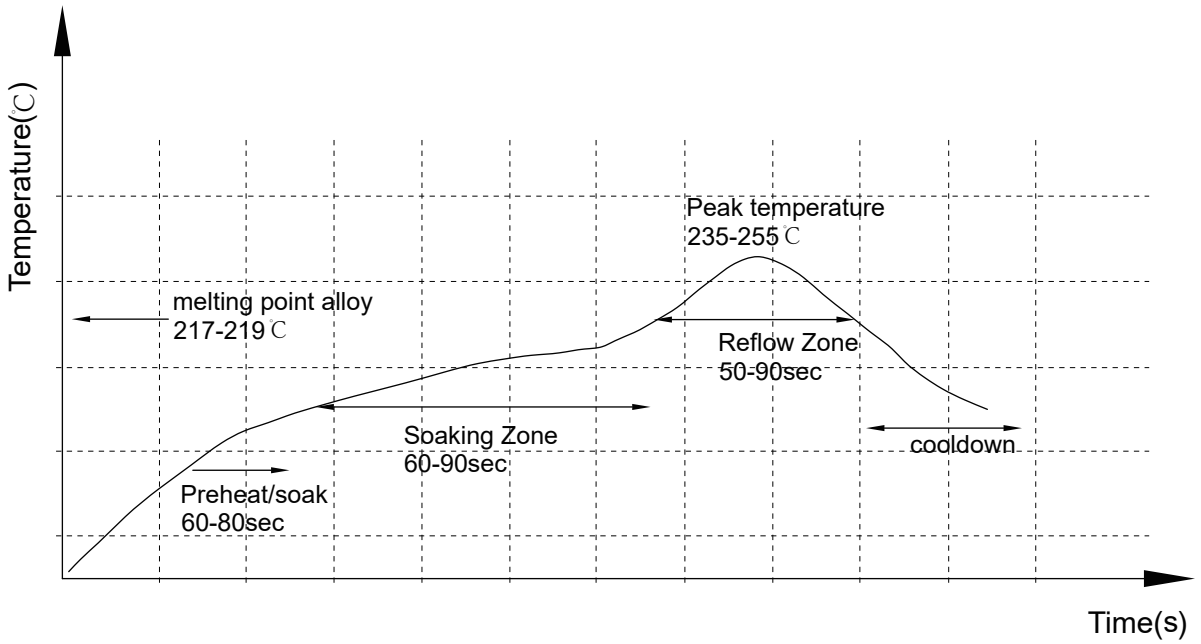

Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China
Tel: 86-755-8355-1886 Fax: 86-755-8355-2533
For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Reliability Test Flow

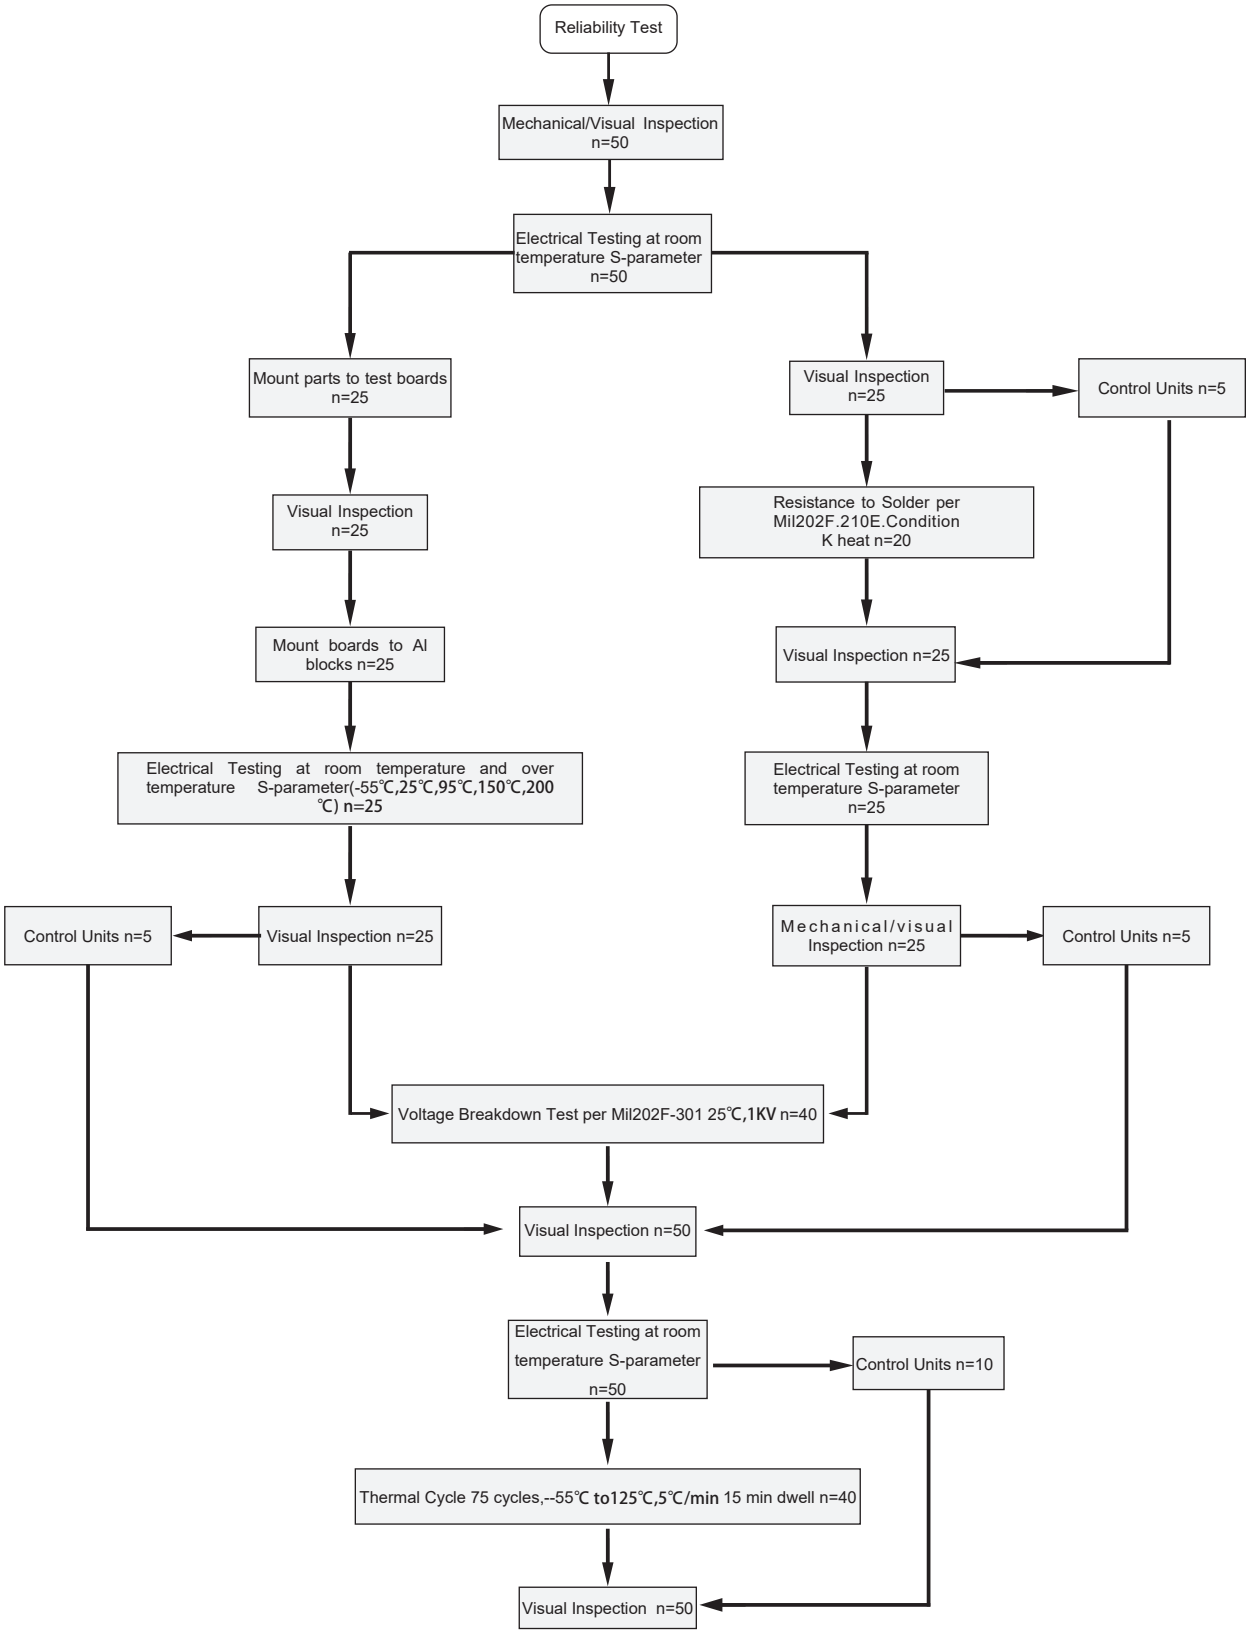

Add：No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen， China
Tel：86-755-8355-1886 Fax：86-755-8355-2533
For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

Reliability Test Flow

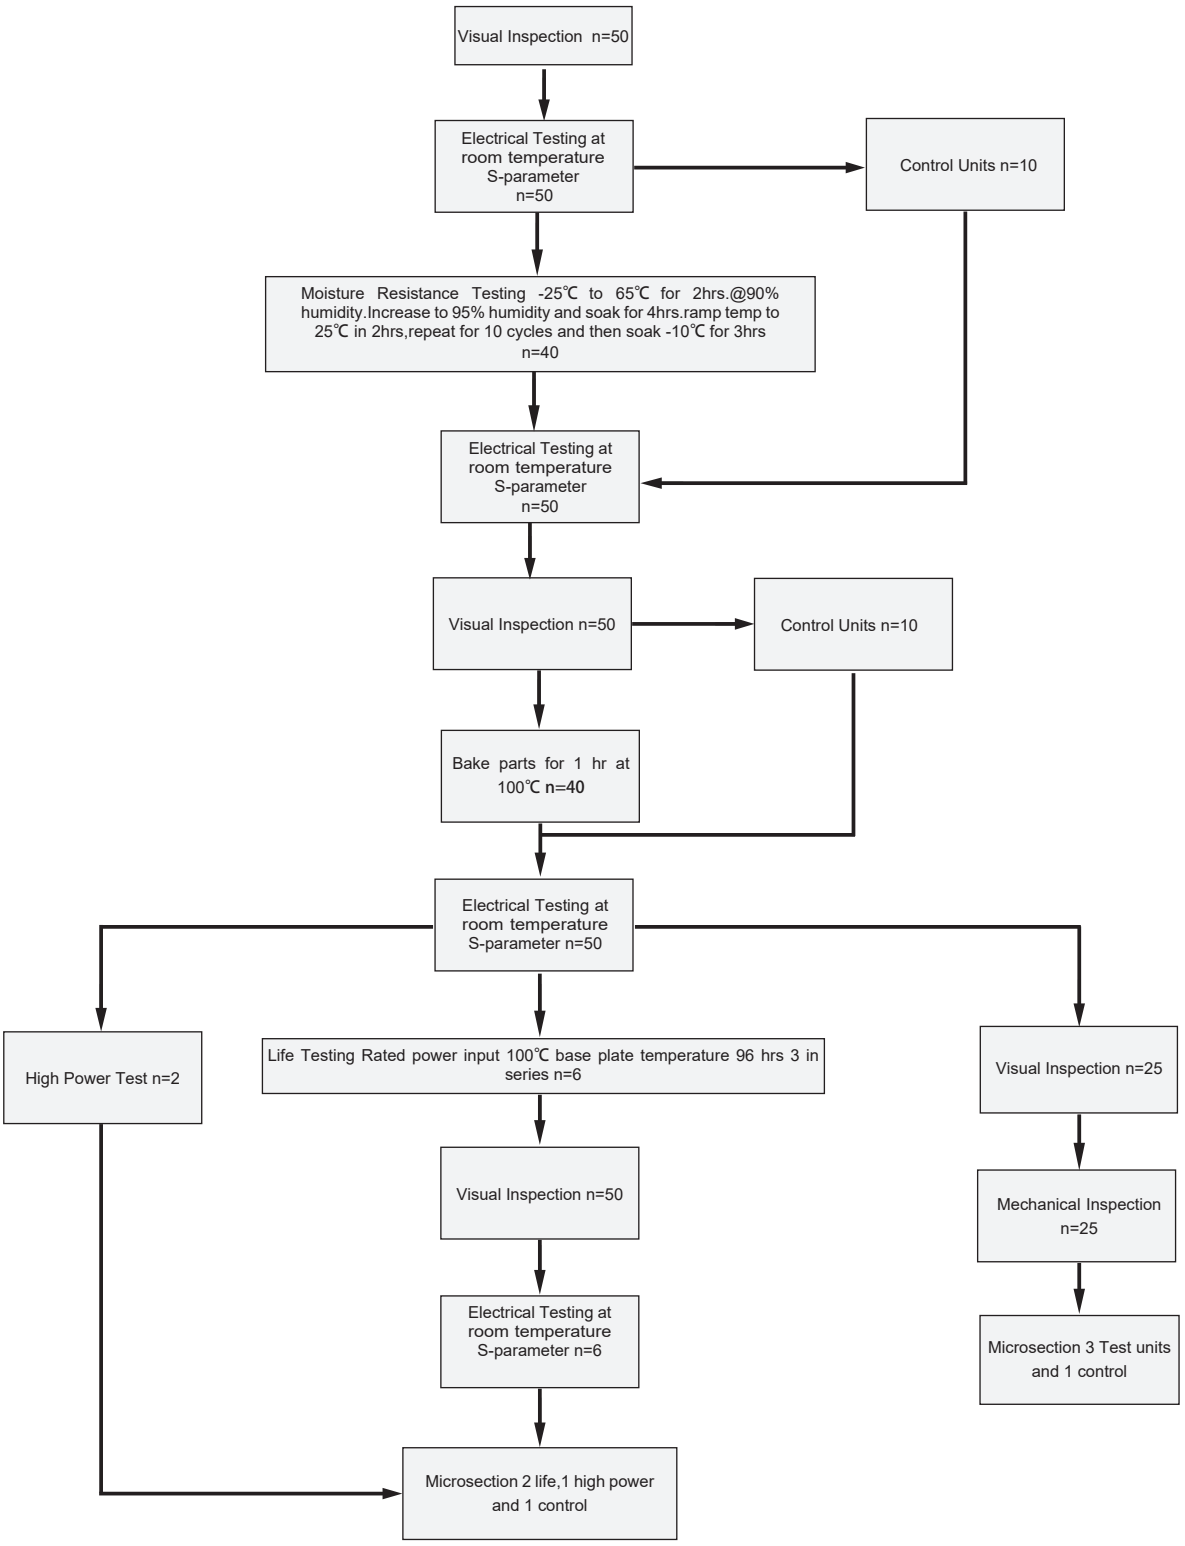

Yantel Corporation

Add：No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen， China
Tel：86-755-8355-1886 Fax：86-755-8355-2533
For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com

DC55F30

Directional Coupler

Rev A1.0

Tape and Reel Drawing

Feeding Direction

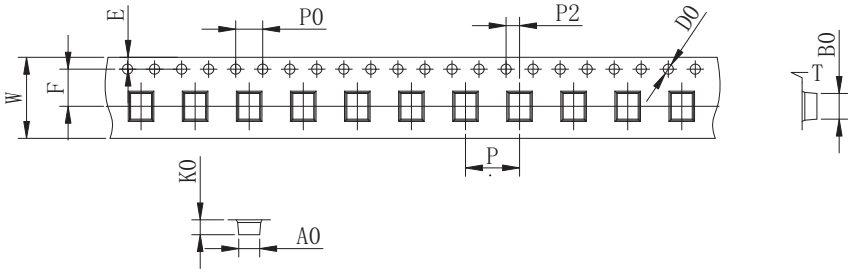

ITEM	W	A0	B0	K0	K1	P	F	E	D	P0	P2	t	7"
DIM(mm)	12.0	3.45	5.35	2.0		8	7.5	1.75	1.50	4.00	2.00	0.30	P/R
TOLE	+0.30 −0.30	+0.10 −0.10	+0.10 −0.10	+0.10 −0.10	+0.10 −0.10	+0.10 −0.10	+0.10 −0.10	+0.10 −0.10	+0.10 −0.00	+0.10 −0.10	+0.10 −0.10	+0.05 −0.05	1000pcs

Notice:

A.10 Sprocket hole pitch cumulative tolerance is 0.2mm.

B. Carrier camber shall be not more than 1mm per 100mm through a length of 250mm.

C. All dimensions meet EIA-418-B requirements.

D. A0 & B0 measured as indicated.

E. K0 measured from a place on the inside bottom of the pocket to top surface of carrier.

F. Material: PE 100

G. Thickness: 0.30±0.05mm

H. 1000 units (maximum) / T&R

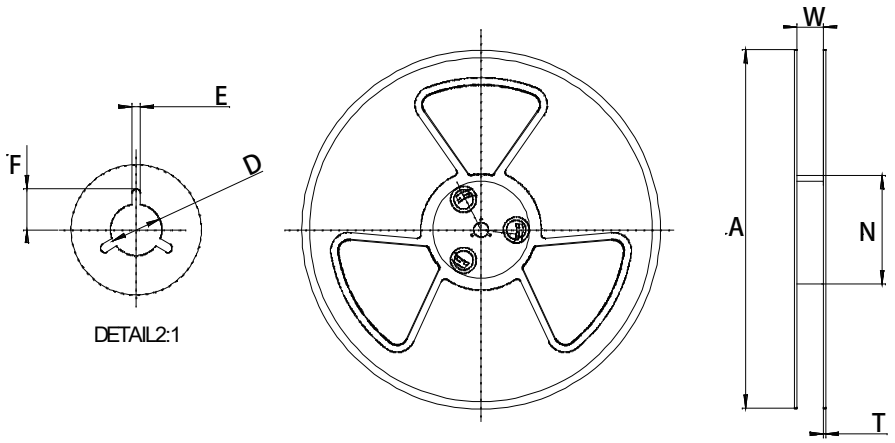

Symbol	Dimensions(mm)
W	12.5±0.4
A	177±0.5
N	63±0.3
T	1.8±0.2
E	2.1±0.3
F	10.75±0.3
D	13.5+0.5/-0.2

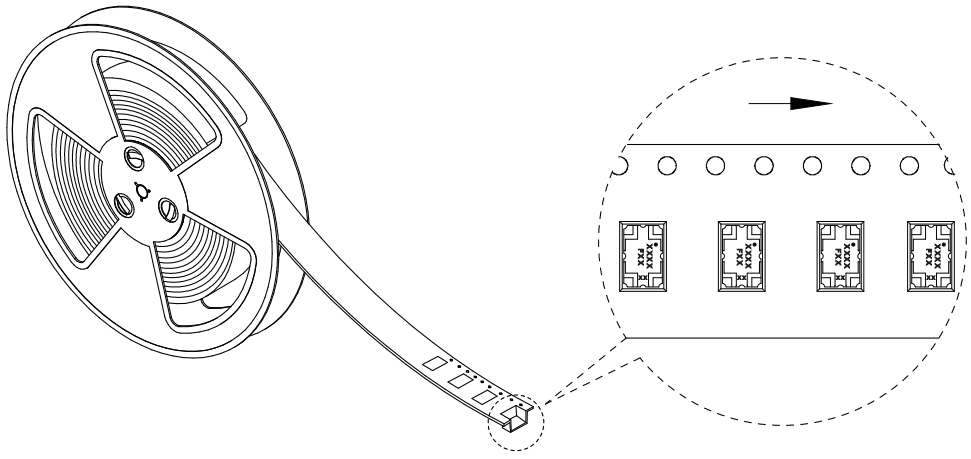

Yantel Corporation

Add: No.308-322, 3F, Building 1, Juchuang Jingu Innovation Park, Wenyuan Road 35, Xili Street, Nanshan, Shenzhen, China
Tel: 86-755-8355-1886 Fax: 86-755-8355-2533
For detailed performance specs & shopping online see Yantel web site : www.yantel-corp.com